


TSI 100 x 315



Technical data

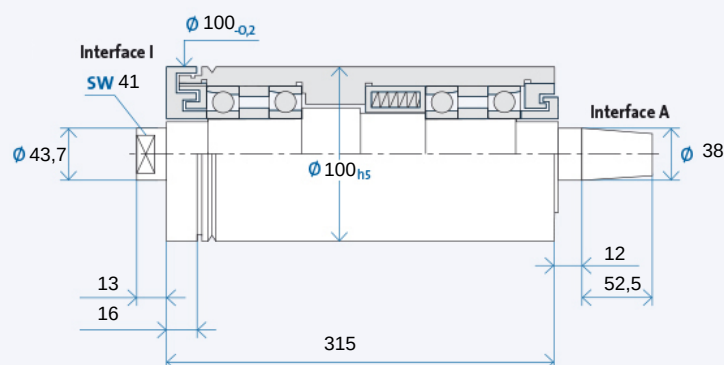


Maximum speed $n_{\max}$ [min-1]* for bearing types:

Steel (steel)	15000
Hybrid (optional)	20000


* without tool

Ordering information: TSI 100 x 315 R is for clockwise, L for counter-clockwise

ROTATION (CW.)




ROTATION (CCW.)



Accessories

Pulleys



Interface	Dimensions [mm]		
	D	C	T
A 38	50	80	60
	63	80	60
	160	80	60


Ordering information pulley: AX_1-X_2

X₁: Interface: 10/13/...

X_2 : Figure from column D

Puller for pulley: $AX_1/\dots$

TSI Grinding quill – semifinished



Ordering information semifinished: X_1
 X_1 : Interface 10/14/...

X₁: Interface 10/14/...