


TSP 40 x 250



Technical data

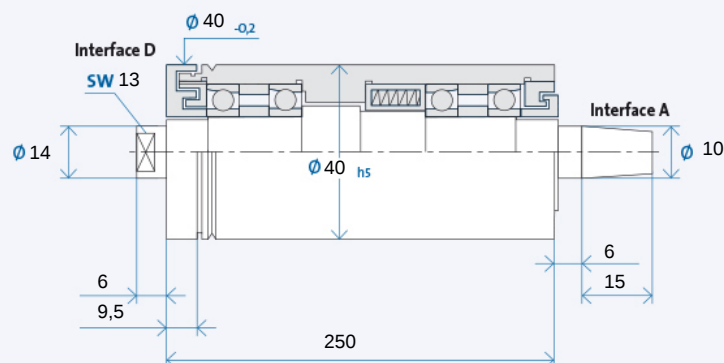


Maximum speed n_{max} [min⁻¹]* for bearing types:

Steel (steel)	45000
Hybrid (optional)	55000


* without tool

Ordering information: TSP 40 x 250 R is for clockwise, L for counter-clockwise


ROTATION (CW.)



ROTATION (CCW.)




Tool interface



Tool interface: fitting bores with flat contact face acc. to GMN precision standards


Pulley interface




Pulley interface: taper 1 : 7,5 nominal value, included angle acc. to GMN precision standards

Accessories


Pulleys

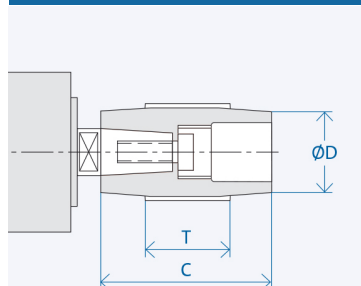

TSP Collet chuck

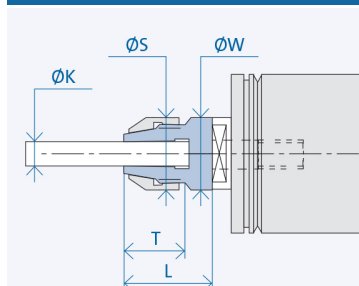

TSP Grinding quill – semifinished



Ordering information semifinished: DX₁/X₂
X₁/X₂ : Interface 08/14/...

Interface	Dimensions [mm]		
	D	C	T
A 10	18	30	20
	50	30	20
	17	40	20
	20	40	20
	25	40	20
	63	40	20

Ordering information pulley: AX₁-X₂

X₁: Interface: 10/13/...

X₂: Figure from column D

Puller for pulley: AX₁/...

Interface	Dimensions [mm]				
	K	T	L	S	W
D 08/14	3	20	26	14	14

Ordering information collet chuck: D 08/14/(K)
(K) = Clamping diameter

Ordering information collet chuck: D 08/14/(K)
(K) = Clamping diameter

This data sheet reflects the state of information at the time of printing. Subject to technical changes. Information on possible options can be obtained from our catalogue which can be downloaded at www.gmn.de