


TSP 80 x 355



Technical data

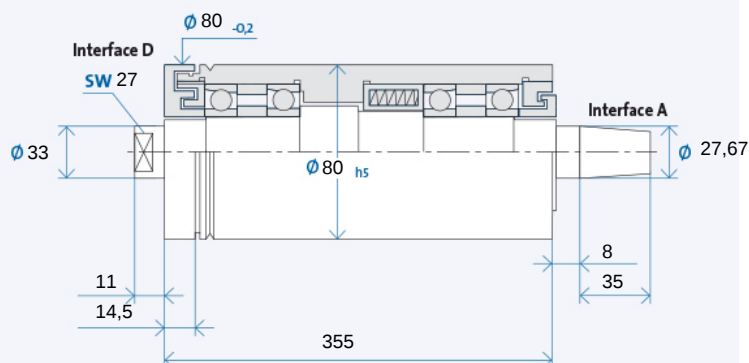


Maximum speed $n_{\max}$ [min⁻¹]* for bearing types:

Steel (steel)	20000
Hybrid (optional)	25000


* without tool

Ordering information: TSP 80 x 355 R is for clockwise, L for counter-clockwise

ROTATION (CW.)




ROTATION (CCW.)



Accessories

Pulleys



Interface	Dimensions [mm]		
	D	C	T
A 27	40	70	50
	45	70	50
	50	70	50
	56	70	50
	125	70	50


Ordering information pulley: AX_1-X_2

X₁: Interface: 10/13/...

X_2 : Figure from column D


Puller for pulley: $AX_1/\dots$

TSP Grinding quill – semifinished




Ordering information semifinished: DX₁/X₂
X₁/X₂ : Interface 08/14/...

Tool interface



Tool interface: fitting bores with flat contact face acc. to GMN precision standards

Pulley interface



Pulley interface: taper 1 : 7,5
nominal value, included angle acc.
to GMN precision standards