




TSI 60 x 355

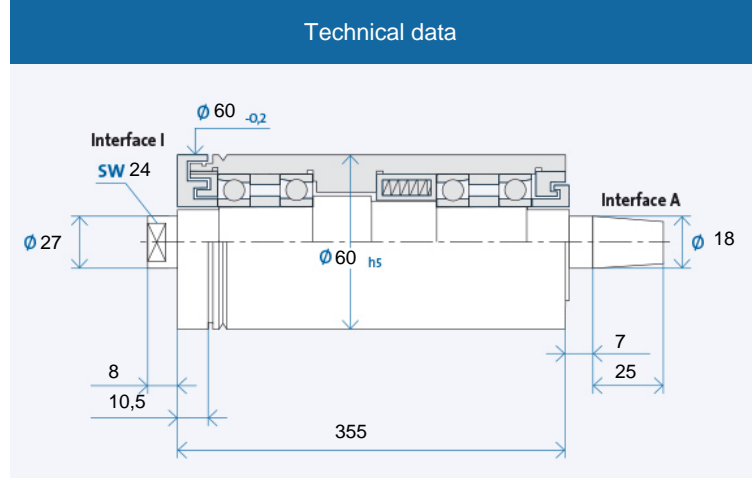


| Maximum speed n_{max} [min ⁻¹]* for bearing types: | |
|--|-------|
| Steel (steel) | 30000 |
| Hybrid (optional) | 35000 |

* without tool

Ordering information: TSI 60 x 355 R is for clockwise, L for counter-clockwise

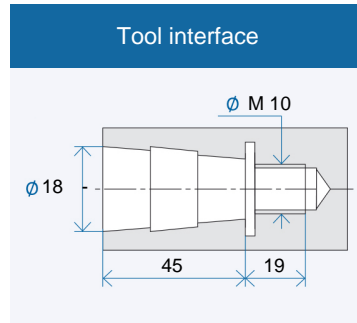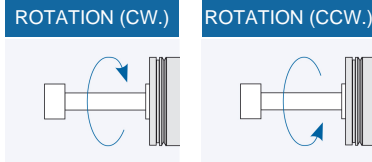


Tool interface: taper 1 : 7,5 nominal value, included angle acc. to GMN precision standards

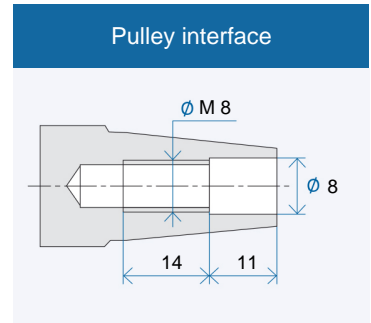


Pulley interface: taper 1 : 7,5 nominal value, included angle acc. to GMN precision standards

Accessories

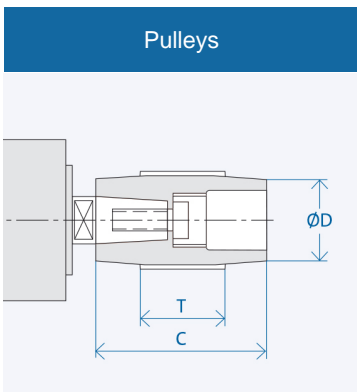


| Interface | Dimensions [mm] | | |
|-----------|-----------------|----|----|
| | D | C | T |
| A 18 | 25 | 60 | 40 |
| | 32 | 60 | 40 |
| | 40 | 60 | 40 |
| | 100 | 60 | 40 |

Ordering information pulley: AX₁-X₂
 X₁: Interface: 10/13/...
 X₂: Figure from column D
 Puller for pulley: AX₁/...

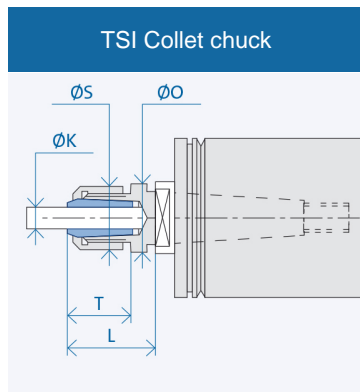

| Interface | Dimensions [mm] | | | | |
|-----------|-----------------|------|----|----|----|
| | K | T | L | S | O |
| I 18 | 3 | 15,5 | 28 | 16 | 23 |
| | 4 | 15,5 | 28 | 16 | 23 |
| | 5 | 15,5 | 28 | 16 | 23 |
| | 6 | 15,5 | 28 | 16 | 23 |

Ordering information collet chuck: I X₁ - (K)
 X₁: Interface: 10/14/...
 (K) = Inner diameter collet chuck

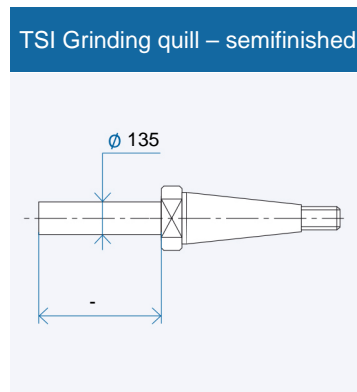

Ordering information semifinished: I X₁
 X₁: Interface 10/14/...