

# Spindle ball bearing HY S 61906 E TA P4+

16.07.2024



## Components


Bearing designation:	HY S 61906 E TA
Bearing design:	S
Series / size:	61906
Ball material:	Ceramic
Cage:	TA
Seal:	2RZ optional (with grease)
Precision:	P4+
Main dimensions [d x D x B]:	30 x 47 x 9 mm

## Load data

Static load capacity	$C_{0r}$ : 5350 N
Dynamic load capacity	$C_r$ : 7400 N
Fatigue load limit	$C_U$ : 202 N
Speed limit	$n_{grease}$ : 35250 1/min
Speed limit	$n_{oil}$ : 47000 1/min
Light preload	L: 60 N
Axial rigidity	$C_{ax}$ : 79 N/ $\mu$ m
Medium preload	M: 190 N
Axial rigidity	$C_{ax}$ : 121 N/ $\mu$ m
Heavy preload	S: 380 N
Axial rigidity	$C_{ax}$ : 160 N/ $\mu$ m
Spring preload	Ff: 380 N (for $n_{max}$ )

## Geometrical Data

Bore diameter	d: 30 mm	Oiling nozzle position	$d_f$ : 36.8 mm
Outer diameter	D: 47 mm	Pitch circle diameter	$d_m$ : 38.5 mm
Width of single bearing	B: 9 mm	Inner diameter of outer ring	$D_1$ : 41.9 mm
Ball diameter	$D_w$ : 4.762 mm	Undercut of associated component	$r_{a \max}$ : 0.3 mm
Number of balls	Z: 18	Undercut of associated component (open side)	$r_{b \max}$ : 0.3 mm
Chamfer (min)	$r_{1,2 \min}$ : 0.3 mm	Abutment diameter inner ring	$d_{a,b \min}$ : 32.3 mm
Chamfer (min), open side	$r_{3,4 \min}$ : 0.3 mm	Abutment diameter outer ring	$D_{a,b \max}$ : 45.1 mm
Outer diameter of inner ring	$d_1$ : 35.1 mm	Inner diameter of outer ring (open side)	$D_2$ : 43.3 mm
Outer diameter of inner ring (open side)	$d_2$ : -	Bearing weight	m: 0.041 kg
		Contact angle	Alpha 0: 25°

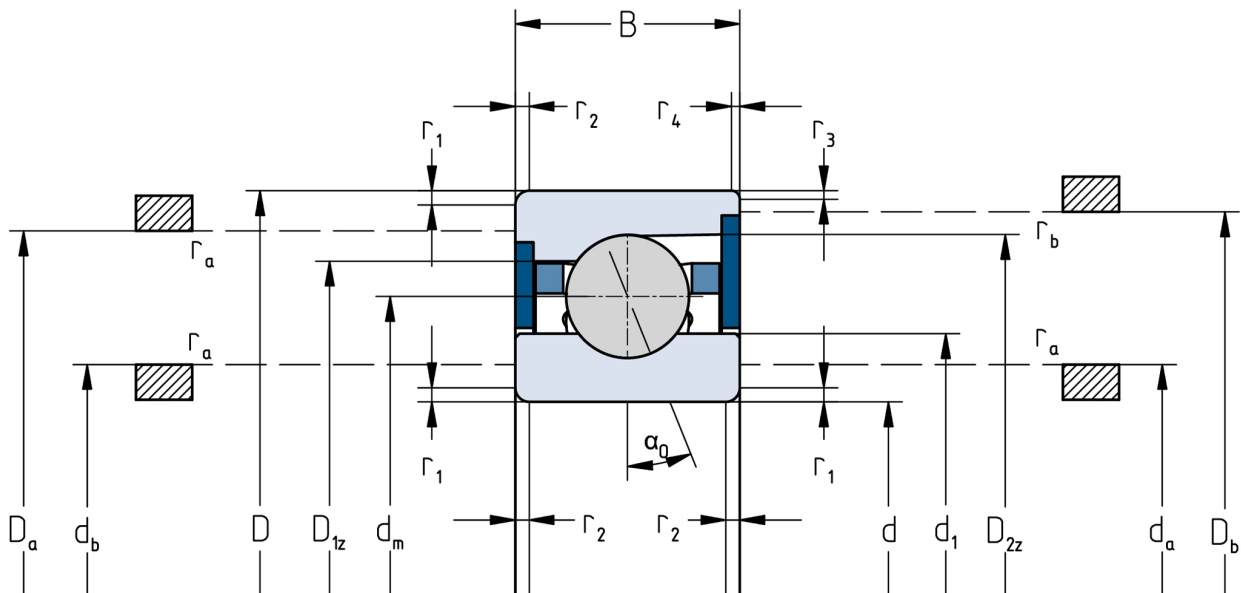

The given speed limits apply to individual bearings with spring preload. Correction factors must be considered for all properties which deviate from this.