


TSA 32 x 125

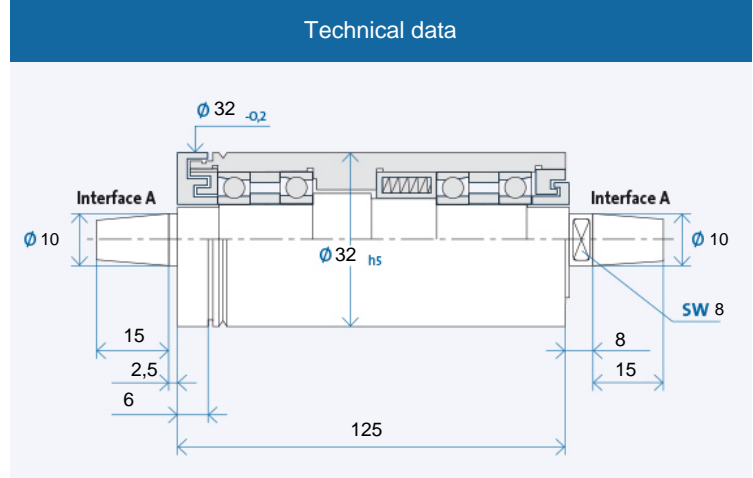


Maximum speed n_{max} [min⁻¹]* for bearing types:


| | |
|-------------------|-------|
| Steel (steel) | 60000 |
| Hybrid (optional) | x |

* without tool


Ordering information: TSA 32 x 125 R is for clockwise, L for counter-clockwise

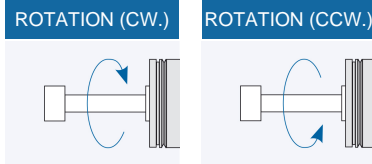

Accessories

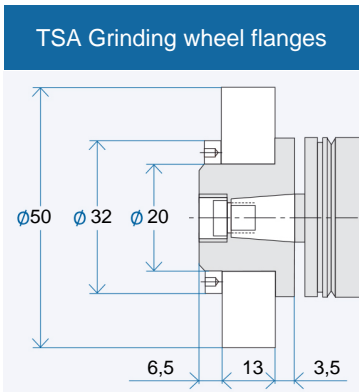


Ordering information flange: AX₁/X₂/X₃
 X₁: Interface: 07/08/...
 X₂: Flange style: MO/MS
 X₃: Wheel:
 K = Corundum grinding wheel
 D = Diamond or CBN grinding wheel
 Puller for flange: AX₁/X₂
 Balancing quill for flange: AX₁

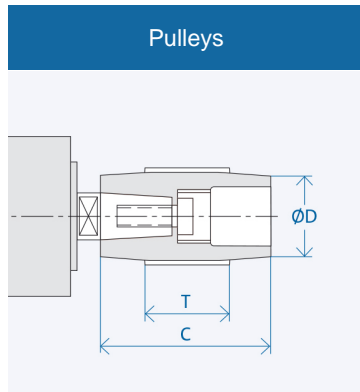


| Interface | Dimensions [mm] | | |
|-----------|-----------------|----|----|
| | D | C | T |
| A 10 | 18 | 30 | 20 |
| | 50 | 30 | 20 |
| | 17 | 40 | 20 |
| | 20 | 40 | 20 |
| | 25 | 40 | 20 |
| | 63 | 40 | 20 |


Ordering information pulley: AX₁-X₂
 X₁: Interface: 07/08/...
 X₂: Figure from column D
 Puller for pulley: AX₁/...

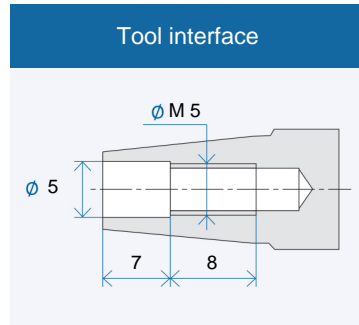

Tool interface: taper 1 : 7,5 nominal value, included angle acc. to GMN precision standards

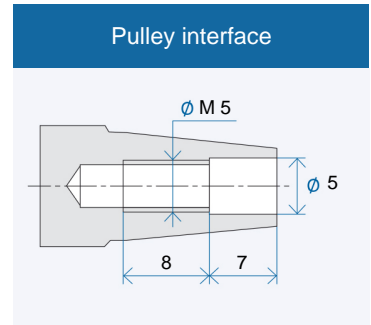

Pulley interface: taper 1 : 7,5 nominal value, included angle acc. to GMN precision standards

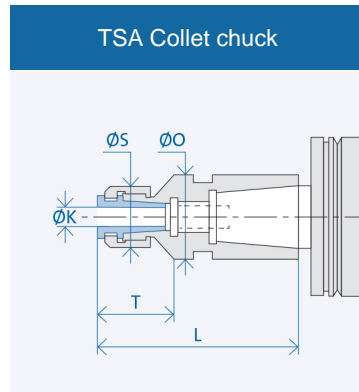

| Interface | Dimensions [mm] | | | | |
|-----------|-----------------|------|----|----|------|
| | K | T | L | S | O |
| A 10 | 2 | 13,5 | 37 | 14 | 13,5 |
| | 3 | 13,5 | 37 | 14 | 13,5 |
| | 4 | 13,5 | 37 | 14 | 13,5 |
| | | | | | |

Ordering information collet chuck: AX₁/X₂-(K)
 X₁: Interface: 07/08/...
 X₂: Housing diameter: 20/26/...
 (K) = Inner diameter collet chuck

This data sheet reflects the state of information at the time of printing. Subject to technical changes. Information on possible options can be obtained from our catalogue which can be downloaded at www.gmn.de