


# TSI 50 x 250




## Technical data

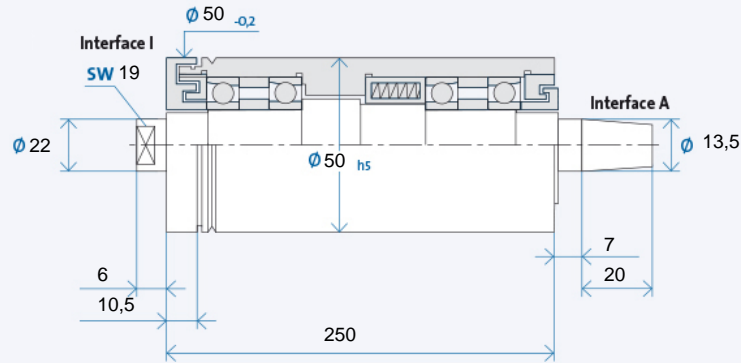


Maximum speed $n_{max}$ [min <sup>-1</sup> ]* for bearing types:	
Steel (steel)	35000
Hybrid (optional)	42000

\* without tool

Ordering information: TSI 50 x 250 R is for clockwise, L for counter-clockwise

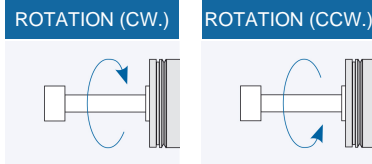


## Tool interface



Tool interface: taper 1 : 7,5 nominal value, included angle acc. to GMN precision standards


## Pulley interface



Pulley interface: taper 1 : 7,5 nominal value, included angle acc. to GMN precision standards

## Accessories

### Pulleys

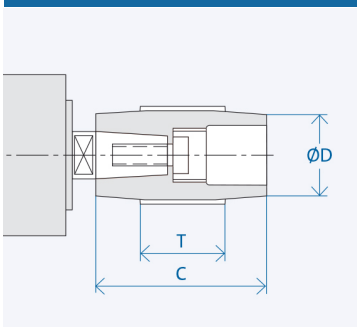

Interface	Dimensions [mm]		
	D	C	T
A 13	20	50	30
	25	50	30
	32	50	30
	80	50	30


Ordering information pulley: AX<sub>1</sub>-X<sub>2</sub>

X<sub>1</sub>: Interface: 10/13/...

X<sub>2</sub>: Figure from column D

Puller for pulley: AX<sub>1</sub>/...

### TSI Collet chuck

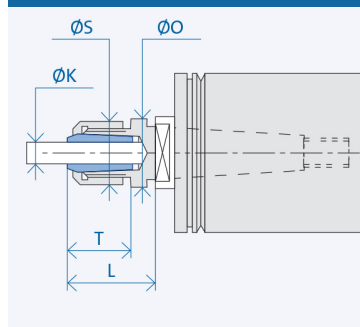


Interface	Dimensions [mm]				
	K	T	L	S	O
I14	3	15,5	25	16	18
	4	15,5	25	16	18
	5	15,5	25	16	18
	6	15,5	25	16	18

Ordering information collet chuck: I X<sub>1</sub> - (K)

X<sub>1</sub>: Interface: 10/14/...

(K) = Inner diameter collet chuck

### TSI Grinding quill – semifinished

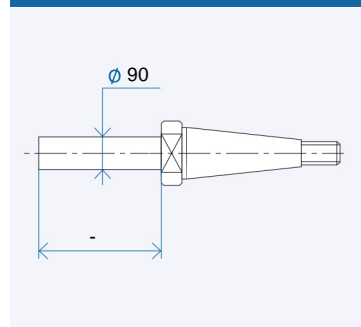

Ordering information semifinished: I X<sub>1</sub>

X<sub>1</sub>: Interface 10/14/...