




# TSP 50 x 250

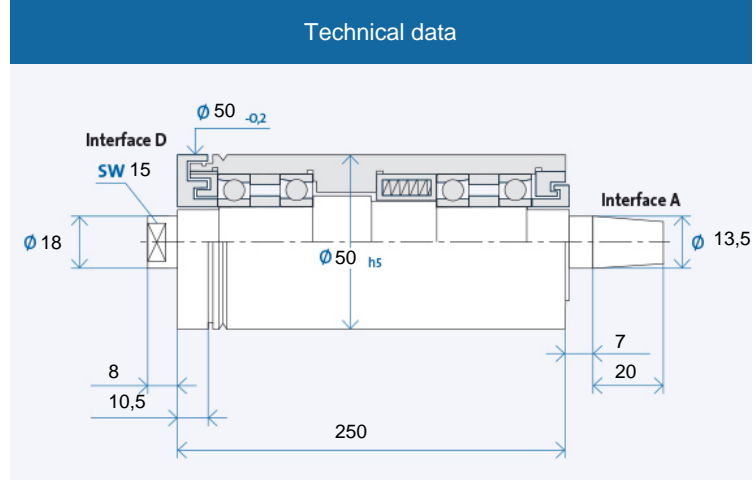


Maximum speed $n_{max}$ [min <sup>-1</sup> ]* for bearing types:	
Steel (steel)	35000
Hybrid (optional)	42000

\* without tool

Ordering information: TSP 50 x 250 R is for clockwise, L for counter-clockwise

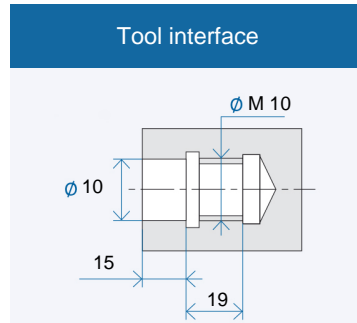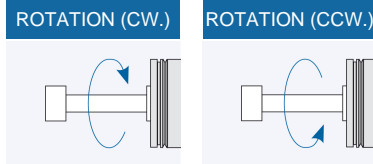


Tool interface: fitting bores with flat contact face acc. to GMN precision standards

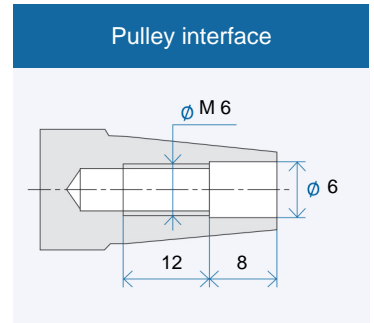


Pulley interface: taper 1 : 7,5 nominal value, included angle acc. to GMN precision standards

## Accessories

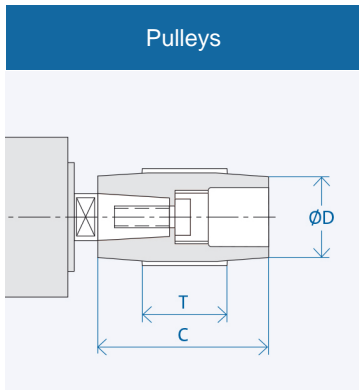


Interface	Dimensions [mm]		
	D	C	T
A 13	20	50	30
	25	50	30
	32	50	30
	80	50	30

Ordering information pulley: AX<sub>1</sub>-X<sub>2</sub>  
 X<sub>1</sub>: Interface: 10/13/...  
 X<sub>2</sub>: Figure from column D  
 Puller for pulley: AX<sub>1</sub>/...

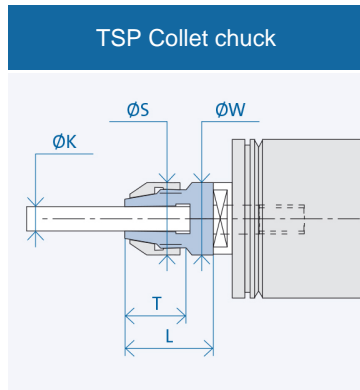

Interface	Dimensions [mm]					
	K	T	L	S	W	
D 10/18	6	20	30	18	18	

Ordering information collet chuck: D 10/18/(K)  
 (K) = Clamping diameter

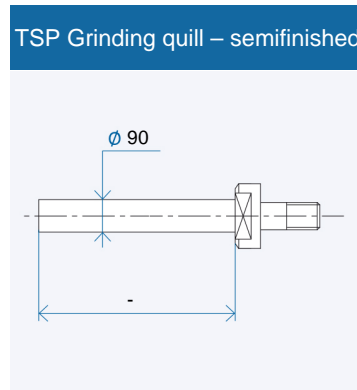

Ordering information semifinished: DX<sub>1</sub>/X<sub>2</sub>  
 X<sub>1</sub>/X<sub>2</sub>: Interface 08/14/...