

Spindle ball bearing HY S 6203 E TA P4+

16.07.2024



Components


Bearing designation:	HY S 6203 E TA
Bearing design:	S
Series / size:	6203
Ball material:	Ceramic
Cage:	TA
Seal:	2RZ upon request
Precision:	P4+ (UP+ Upon request)
Main dimensions [d x D x B]:	17 x 40 x 12 mm

Load data

Static load capacity	C_{0r} : 5900 N
Dynamic load capacity	C_r : 11000 N
Fatigue load limit	C_U : 223 N
Speed limit	n_{grease} : 48000 1/min
Speed limit	n_{oil} : 64000 1/min
Light preload	L: 90 N
Axial rigidity	C_{ax} : 76 N/ μ m
Medium preload	M: 280 N
Axial rigidity	C_{ax} : 116 N/ μ m
Heavy preload	S: 560 N
Axial rigidity	C_{ax} : 155 N/ μ m
Spring preload	Ff: 420 N (for n_{max})

Geometrical Data

Bore diameter	d: 17 mm	Oiling nozzle position	d_f : 26.6 mm
Outer diameter	D: 40 mm	Pitch circle diameter	d_m : 28.5 mm
Width of single bearing	B: 12 mm	Inner diameter of outer ring	D_1 : 33 mm
Ball diameter	D_w : 6.747 mm	Undercut of associated component	$r_{a max}$: 0.6 mm
Number of balls	Z: 11	Undercut of associated component (open side)	$r_{b max}$: 0.3 mm
Chamfer (min)	$r_{1,2 min}$: 0.6 mm	Abutment diameter inner ring	$d_{a,b min}$: 20.9 mm
Chamfer (min), open side	$r_{3,4 min}$: 0.3 mm	Abutment diameter outer ring	$D_{a,b max}$: 37.2 mm
Outer diameter of inner ring	d_1 : 24.1 mm	Inner diameter of outer ring (open side)	D_2 : 35.4 mm
Outer diameter of inner ring (open side)	d_2 : -	Bearing weight	m: 0.055 kg
		Contact angle	Alpha 0: 25°

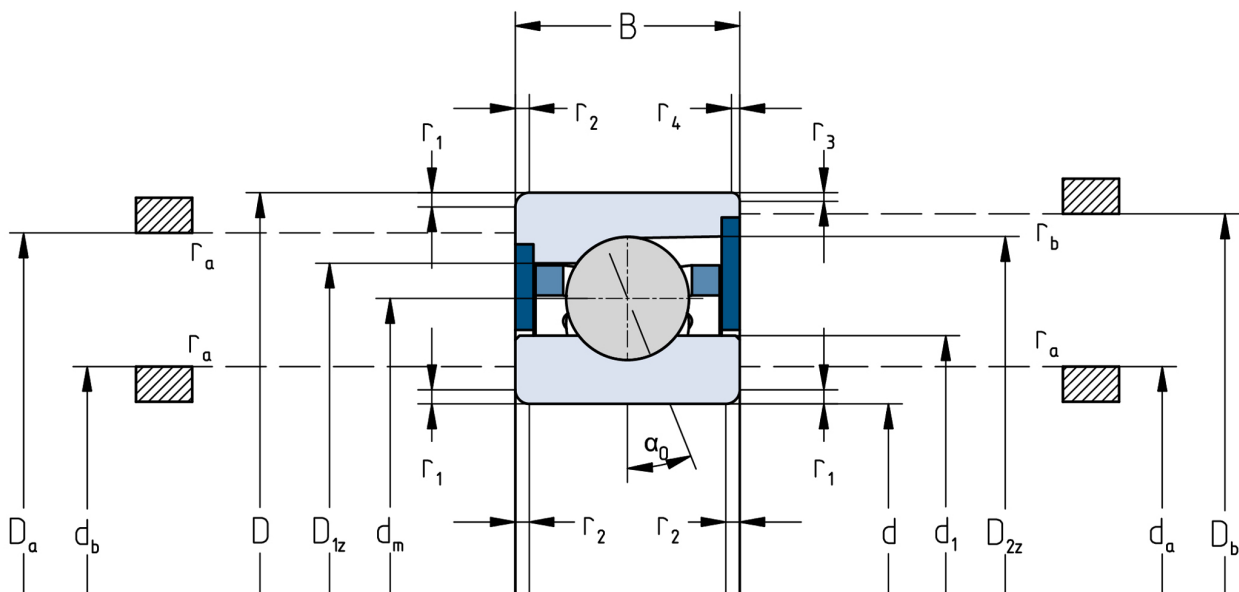

The given speed limits apply to individual bearings with spring preload. Correction factors must be considered for all properties which deviate from this.