

Spindle ball bearing HY SM 6018 C TA P4+

16.07.2024



Components


Bearing designation:	HY SM 6018 C TA
Bearing design:	SM
Series / size:	6018
Ball material:	Ceramic
Cage:	TA
Seal:	2RZ optional (with grease)
Precision:	P4+
Main dimensions [d x D x B]:	90 x 140 x 24 mm

Load data

Static load capacity	C_{0r} : 37500 N
Dynamic load capacity	C_r : 52000 N
Fatigue load limit	C_U : 1311 N
Speed limit	n_{grease} : 16125 1/min
Speed limit	n_{oil} : 21500 1/min
Light preload	L: 270 N
Axial rigidity	C_{ax} : 106 N/ μ m
Medium preload	M: 800 N
Axial rigidity	C_{ax} : 160 N/ μ m
Heavy preload	S: 1590 N
Axial rigidity	C_{ax} : 211 N/ μ m
Spring preload	Ff: 1630 N (for n_{max})

Geometrical Data

Bore diameter	d: 90 mm	Oiling nozzle position	d_f : 110.6 mm
Outer diameter	D: 140 mm	Pitch circle diameter	d_m : 115 mm
Width of single bearing	B: 24 mm	Inner diameter of outer ring	D_1 : 124.2 mm
Ball diameter	D_w : 15.081 mm	Undercut of associated component	$r_{a max}$: 1.5 mm
Number of balls	Z: 20	Undercut of associated component (open side)	$r_{b max}$: 0.6 mm
Chamfer (min)	$r_{1,2 min}$: 1.5 mm	Abutment diameter inner ring	$d_{a,b min}$: 98.9 mm
Chamfer (min), open side	$r_{3,4 min}$: 0.6 mm	Abutment diameter outer ring	$D_{a,b max}$: 132.6 mm
Outer diameter of inner ring	d_1 : 105.8 mm	Inner diameter of outer ring (open side)	D_2 : 130.3 mm
Outer diameter of inner ring (open side)	d_2 : -	Bearing weight	m: 0.98 kg
		Contact angle	Alpha 0: 17°

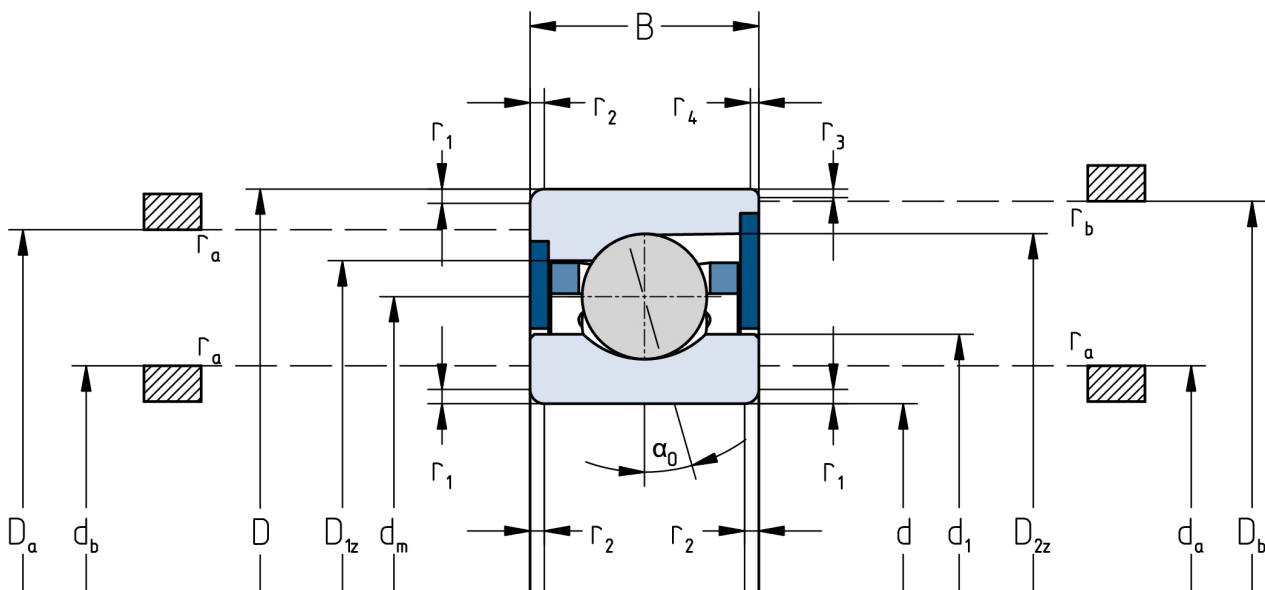

The given speed limits apply to individual bearings with spring preload. Correction factors must be considered for all properties which deviate from this.