

Spindle ball bearing S 61808 E TA P4+

16.07.2024



Components


Bearing designation:	S 61808 E TA
Bearing design:	S
Series / size:	61808
Ball material:	Steel 100Cr6
Cage:	TA
Precision:	P4+
Main dimensions [d x D x B]:	40 x 52 x 7 mm

Load data

Static load capacity	C_{0r} : 3750 N
Dynamic load capacity	C_r : 3800 N
Fatigue load limit	C_U : 194 N
Speed limit	n_{grease} : 24000 1/min
Speed limit	n_{oil} : 32000 1/min
Light preload	L: 30 N
Axial rigidity	C_{ax} : 61 N/ μ m
Medium preload	M: 100 N
Axial rigidity	C_{ax} : 96 N/ μ m
Heavy preload	S: 190 N
Axial rigidity	C_{ax} : 123 N/ μ m
Spring preload	Ff: 370 N (for n_{max})

Geometrical Data

Bore diameter	d: 40 mm	Oiling nozzle position	d_T : 44.9 mm
Outer diameter	D: 52 mm	Pitch circle diameter	d_m : 46 mm
Width of single bearing	B: 7 mm	Inner diameter of outer ring	D_1 : 48.1 mm
Ball diameter	D_w : 3.175 mm	Undercut of associated component	$r_{a \max}$: 0.3 mm
Number of balls	Z: 26	Undercut of associated component (open side)	$r_{b \max}$: 0.3 mm
Chamfer (min)	$r_{1,2 \min}$: 0.3 mm	Abutment diameter inner ring	$d_{a,b \min}$: 41.6 mm
Chamfer (min), open side	$r_{3,4 \min}$: 0.3 mm	Abutment diameter outer ring	$D_{a,b \max}$: 50.5 mm
Outer diameter of inner ring	d_1 : 43.9 mm	Inner diameter of outer ring (open side)	D_2 : 49.2 mm
Outer diameter of inner ring (open side)	d_2 : -	Bearing weight	m: 0.03 kg
		Contact angle	Alpha 0: 25°

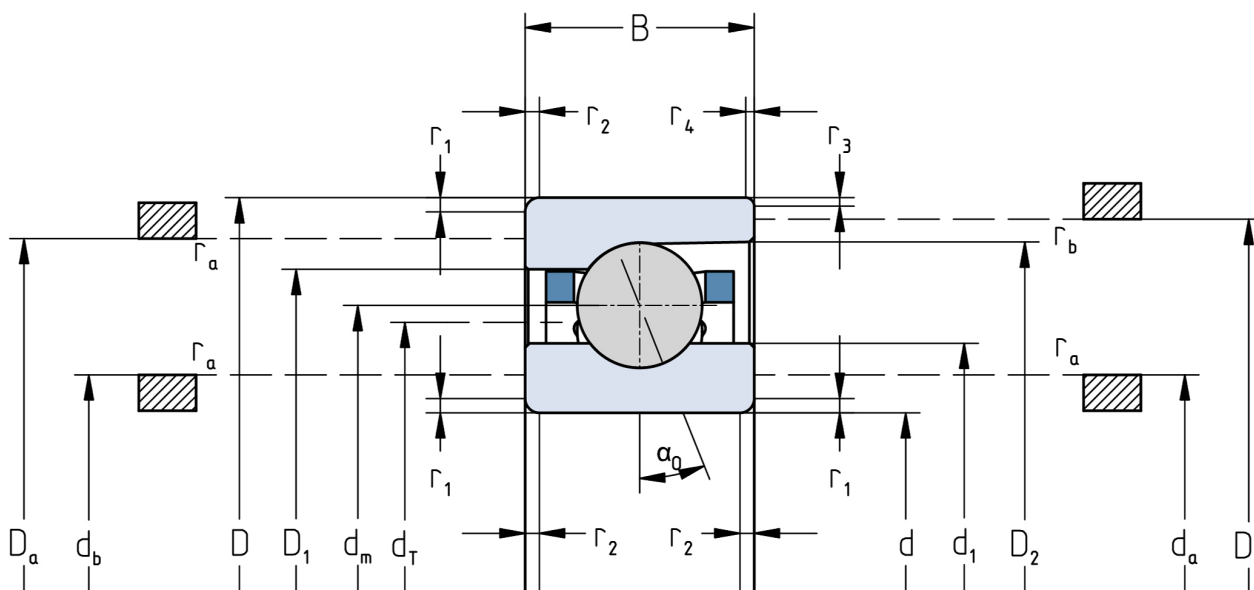

The given speed limits apply to individual bearings with spring preload. Correction factors must be considered for all properties which deviate from this.